


# family seat®





## TOP FIXING INSTRUCTIONS


FITTING INSTRUCTIONS FOR STANDARD TOP FIXING PANS – WHERE YOU CAN TIGHTEN SCREW FROM UNDER THE PAN

Thank you for purchasing a Family Seat. Please check that you have all of the fixing components (as shown below) before fitting. There are 2 sets of fittings being Bottom Fix (method A) and Top Fix (method B). The standard components are used for either:

### STANDARD COMPONENTS

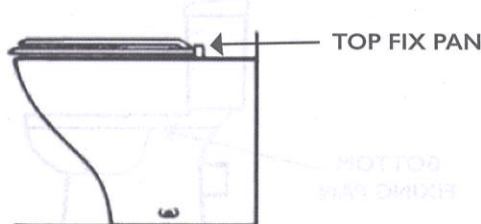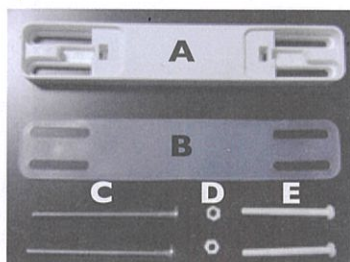

### TOP FIX COMPONENTS



Carefully remove the Family Seat and all the fitting components from its packaging. For your convenience disposable gloves have been supplied for the removal of the old seat and fitting your new Family Seat. Select appropriate components for either Bottom or Top Fixing.

### Top Fixing Instructions for Polypropylene family seat

1. Using disposable gloves provided remove the old toilet seat.
2. Select the standard components A, B, C, D, E & H as shown above. You will not need components F & G for a top fixing installation.
3. Select the nylon expansion nut (H) and put it into the two seat fixing holes of the pan. (see fig 1)
4. Place bolts (C) through fixing block (A) Take the rubber gasket (B) and push over bolts (C) so that it locates on the underside of (A) (see fig 2). Insert bolts into nylon expansion nuts and loosely tighten to allow the seat to be offered up to gain correct position on the pan.
5. If adjustment is needed – move bolts (C) along the slots or move to the other set of slots in (A) repeating step 4 above.
6. Once correct position is achieved, fully tighten the bolts (C) until the hinge block is firmly held in position.. (see fig 3).
7. Insert the 2 Nylon nuts (D) into the positions as shown ( see fig 4).
8. Place seat using the hinge arms to locate in the hinge block and push down firmly until fully located (see fig 5).
9. Finally using the nylon screws (E) fix the hinge posts of the seat into the hinge block (A) and fully tighten. (see fig 6)

FIG 1



FIG 2

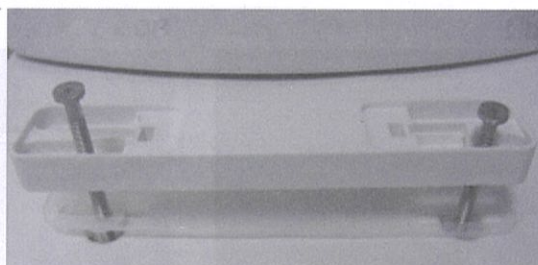


FIG 3

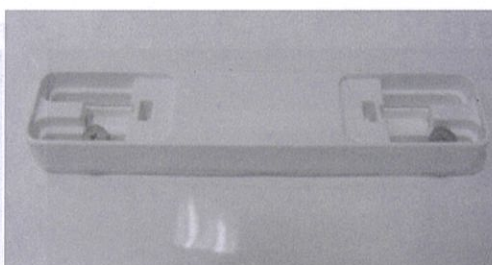


FIG 4

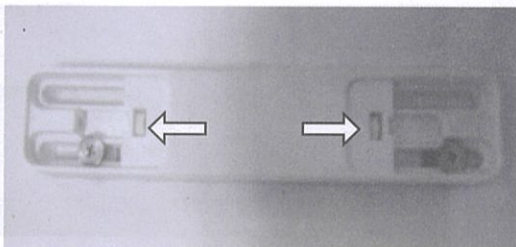


FIG 5

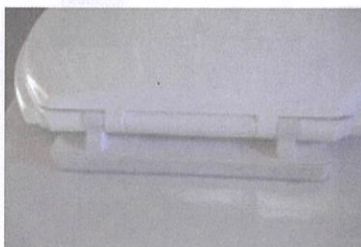


FIG 6



### Cleaning Instructions

Do not use abrasive cleaning products or products containing chlorine or acids, as these may cause yellowing or peeling of the material. Use ONLY a mild detergent/non-abrasive household cleaner or neutral soap or natural household cleaning products which are best for effective, problem-free cleaning. **Do not use bleach or any products containing bleach on the seat.** Do not mix cleaning products as this can cause a reaction. After cleaning, ensure the chrome hinge is dried. Leave the seat and lid up whenever strong cleaning products (such as bleach) are left in the pan bowl to prevent damage to the seat from the vapours.

236CS001-121-02X





**family  
seat®**




## BOTTOM FIXING INSTRUCTIONS

FITTING INSTRUCTIONS FOR STANDARD TOP FIXING PANS – WHERE YOU CAN TIGHTEN SCREW FROM UNDER THE PAN  
Thank you for purchasing a Family Seat. Please check that you have all of the fixing components (as shown below) before fitting. There are 2 sets of fittings being Bottom Fix (method A) and Top Fix (method B). The standard components are used for either.

### STANDARD COMPONENTS

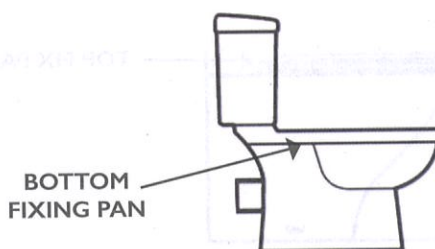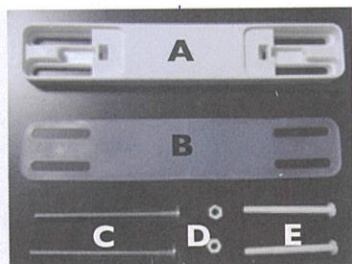

### BOTTOM FIX COMPONENTS

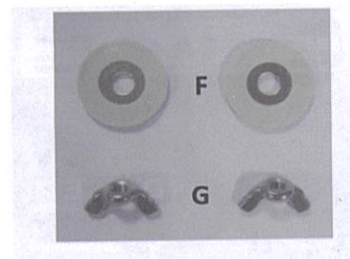

Carefully remove the Family Seat and all the fitting components from its packaging. For your convenience disposable gloves have been supplied for the removal of the old seat and fitting your new Family Seat. Select appropriate components for either Bottom or Top Fixing.

### Bottom Fixing instructions for a Polypropylene family seat

1. Using disposable gloves provided remove the old toilet seat.
2. Select fitting components A, B, C, D, E, F & G, as shown above. You will not need components (H) for a bottom fixing installation.
3. Place bolts (C) through fixing Block (A) then place the rubber gasket (B) over bolts (C) so that it locates on the underside of block (A). Place Block (A) on pan with Bolts (C) through fixing holes. Offer seat up to find seat position on Pan (fig 1).
4. If adjustment is needed – move bolts (C) along the slots or move to the other set of slots in (A) repeating step 3 above.
5. Once correct position is achieved, from underneath the pan slide the washers (F) over the bolt (C) with the metal face of washer facing down, (see fig 2). Then Screw on metal wing nuts (G) and tighten until the hinge block (A) is firmly held in position. While tightening up from underneath, please use a screw driver to hold the position of the screw from the top to avoid the bolt turning around.
6. Insert the 2 Nylon nuts (D) into the positions as shown in fig 3.
7. Place seat using the hinge arms to locate in the hinge block and push down firmly until fully located (see fig 4).
8. Finally using the nylon screws (E) fix the hinge posts of the seat into the hinge block (A) and fully tighten. (see fig 5)

FIG 1

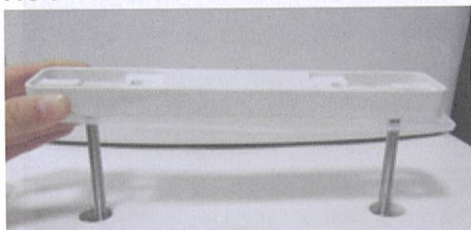


FIG 2




FIG 3

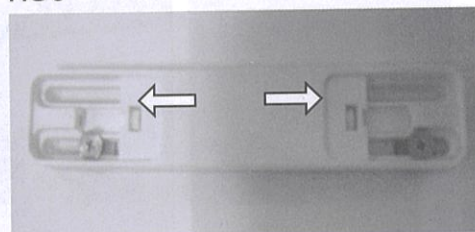


FIG 4

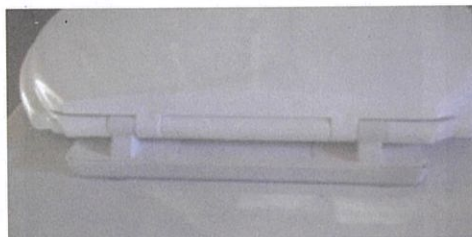


FIG 5



### Cleaning Instructions

Do not use abrasive cleaning products or products containing chlorine or acids, as these may cause yellowing or peeling of the material. Use ONLY a mild detergent/non-abrasive household cleaner or neutral soap or natural household cleaning products which are best for effective, problem-free cleaning. **Do not use bleach or any products containing bleach on the seat.** Do not mix cleaning products as this can cause a reaction. After cleaning, ensure the chrome hinge is dried. Leave the seat and lid up whenever strong cleaning products (such as bleach) are left in the pan bowl to prevent damage to the seat from the vapours.